





YEB1LE

MINIATURE CIRCUIT BREAKER

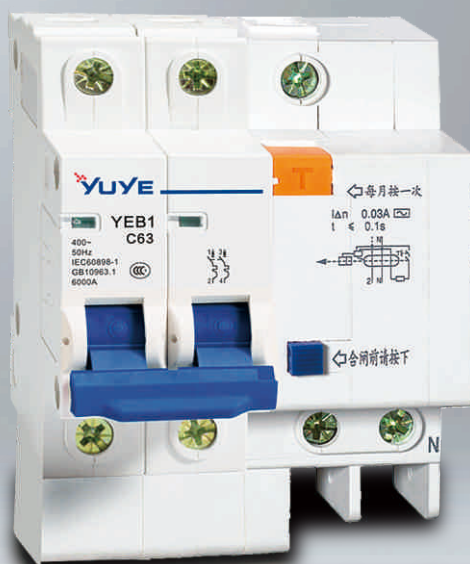

Product Type



Standards: GB/T 16917.1、GB/T 10963.1、IEC61009-1、IEC60898-1

Name	Details
Enterprise code	Shanghai Yuhuang Electric Co.,Ltd.
Product category	Miniature Circuit Breaker
Design code	1
Function code	Electronic type residual current protection function
Current rank	63
Pole	1P, 1P+N, 2P, 3P, 3P+N, 4P
Neutral pole	+N
Using code	C=Light distribution, D=Motor protection
Rated current	3A~63A
Residual initiating current	30,50,100,300

Technical parameter

Rated voltage(V)	Rated frame graded Current I _{nm} (A)	Pole	Neutral	Rated current(A)	Rated leakAge operate current I _Δ no (mA)	Rated leakAge no operate current I _Δ no (mA)	Rated leakAge operate time(s)
230	63	1	+N	3,6,10,16, 20,35,32, 40,50,63	30,(50), (100),(300)	15,(25),(50), (150)	<0.1
230/400	63	2					<0.1
230/400	63	3	+N				<0.1
230/400	63	3					<0.1
230/400	63	4					<0.1

Remark:

1.Wiring with clamp terminal,Hardwire can be connect to 25mm² and below ,

2.Notice:Rated residual current of 30mA or less indirect protection or personal saretfeatures, but not simultaneously contact the two wires leakAge protection at the same time.